


SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER

Walker Fencing Sublime for roofs

Inside and outside ring including gate

Fencing for a 16-meter roof / Article no. 17-4-30-10016



Our sustainable steel fencing for track roofs and full roof covers, crafted with high-quality steel C-profiles. Each truss section is equipped with 2 fencing sections, which can be filled according to your preference with plastic boards, pressure-treated wood boards, or hardwood planks. Explore the versatility and quality of our fencing options for a stylish and functional addition to the roof.

All steel components are thermally galvanized, and the fencing is supplied with all necessary fastening materials.

- ✓ Safe
- ✓ Sustainable
- ✓ Strong
- ✓ Smooth finish



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER



Features

Outside Fencing:


The robust and durable fence for the roofs, with a height of 1.6 meters for optimal safety. The posts between the rafters, securely connected to purlins, are cast in concrete for additional stability. The steel C-profile below, above, and doubled in the middle is suitable for boards up to 32 mm thick, resulting in an extremely solid enclosure. The outer fence also includes a gate of 2x2 meters, with a C-profile below and above suitable for boards up to 32 mm thick. The upper part of the gate is standardly equipped with bars, providing a perfect combination of safety and aesthetics.

Inside Fencing:

With a height of 1.6 meters, our indoor fence provides optimal safety. The posts are cast in concrete for extra stability. The C-profile below, above, and doubled in the middle is suitable for boards up to 32 mm thick, resulting in an extremely solid enclosure.

The indoor fence features a gate of 2x1.6 meters, with a C-profile below, above, and doubled in the middle, suitable for boards of up to 32 mm thick, including 1 heavy-duty beam where the gate is suspended between.

Discover the durability and safety of our indoor and outdoor enclosures for a stylish addition to your canopy.



SOLARIUM



IRRIGATION



TREADMILL




SAFETY WALL



WALKER

Standard options

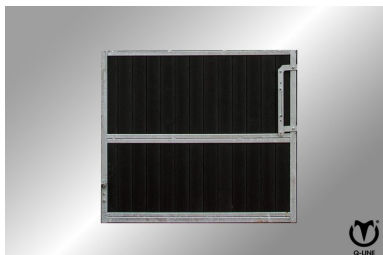

Plastic Planks



Impregnated Planks



Hardwood Planks



Fast setting concrete



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

Specifications

Basic material	Steel galvanized
Fixings	included
Thickness	50 mm
Suited for	Passage and Dome roofs
Height	1,6 meter
Length	2x ca 2 meter
Not included	Panel filling, Concrete
Optional	Powder coating
Other	Consists of 40 compartments

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com