


SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER

Basic XL horse walker

18 meter 6 horses

18 meter 6 horses / Article no. 22-5-15-00618



This model is very suitable for the private stable with its own horses. With a safe feeling you can work your horses knowing they are getting the right exercise simply but effectively. The standard walk control provides your horse the daily exercise. As standard it is equipped with adjustable timer for direction change and the speed can easily be adjusted with the speedometer.

- ✓ elastic coupling
- ✓ Electric shock preparation
- ✓ Low maintenance
- ✓ Easy to operate
- ✓ Mesh drift fences



SOLARIUM



IRRIGATION




TREADMILL



SAFETY WALL



WALKER

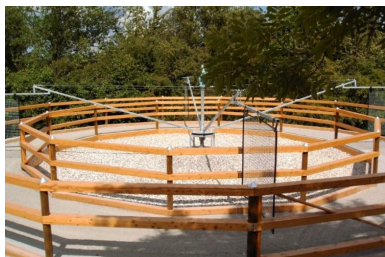

Features

Safety:

The Q-line® horse exercisers are specially designed to be as safe as they can be and are equipped with a direct drive with elastic coupling, lightweight mesh fences and electrical safety settings. All moving parts are protected from contact.

Durability:

By making use of high quality industrial material we can ensure a long lifespan. The technologically advanced design makes the Q-line® horse exerciser rotate smooth- and quietly. The minimal friction put less strain on the driving engine so that little energy is used.

External characteristics:

In the designing Q-line® has strived to create a compact and minimalistic appearance. The push fences hang 2 meter high and are 1,97 meter wide and 1,22 high and are around protected with a plastic cover.

Maintenance:

The Q-line® exerciser is a solid construction and requires little maintenance. The technologically advanced design and choice in materials minimize corrosion so that maintenance is barely needed.


Quality mark:

All Q-Line® Horse exercisers conform to the machine code 2006/42/EG and are fit with the CE quality mark. The Q-line® solaria are certifiably approved by KEMA according to the NEN 3140 and OSH directive en hereby conform to all European safety requirements.

Control:

The control box is equipped with an internally adjustable timer for direction change.

The speed is easy to set with the waterproof speed potentiometer.



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL




WALKER

Standard options



Basic XL fencing 18,6 mtr

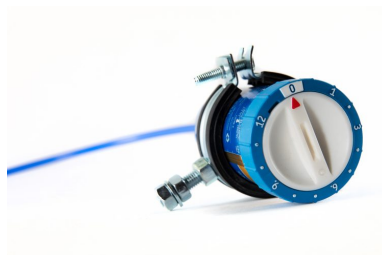

Lubrication system 12 months



Shock device set Basic 230



Track irrigation Basic



Control box cover

**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

Specifications

Diameter	18 meter
nr of horses	6
Drive system	Direct drive
Speed	12 kmh adjustable
Time	6 minutes turn time
Drive system	Direct drive
Secure	Elastic coupling
Drift Fence	Mesh with all-round protection 2x1,5 mtr
Other	Center post on middle frame
Electronic brake	Yes
Power supply	230V, 50Hz
Fuse with	16A Type F
Power usage	1000 Watt
Fixings	Including
Basic material	Galvanised steel NEN-EN-ISO 1461-99.
IP rating	54
Suplied as standard	Controlbox WCB 1.1
Cable length	Motor cable 14 meters
Quality mark	CE / NEN 3140 / OSH
Included	Shock preparation
Transport weight	450Kg
Transport size	1 pallet 300cm x 80cm x 150cm

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com