



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

Ceiling Mounted Horse Exercisers

18 meter 6 horses

18 meter 6 horses / Article no. 22-5-25-00618



**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

Horse Exerciser Integrated in the Roof

At Q-Line, we offer an innovative horse exerciser that is integrated into the roof structure. This model is suitable for an 18-meter diameter and accommodates up to six horses. It is ideal for stables and equestrian facilities that want to save space without compromising on quality, safety or ease of use.

Efficient and Space-Saving Design

A roof-mounted exerciser makes smart use of the existing roof structure. Because the system is attached to the roof, the ground area remains free and uncluttered. This is especially useful for facilities with limited outdoor space. Despite its compact design, you benefit from all the functions of a full-size horse exerciser.

Controlled and Safe Movement

This exerciser is equipped with:

- Electronic braking system
- Preparation for electric fencing
- Lightweight, impact-resistant push gates
- Central direct-drive unit with safety coupling
- Two-position switch for walk or walk/trot

Thanks to the roofed design, horses move in a calm and protected environment — regardless of rain, snow or strong sunlight.

Flexible Use Within Different Routines

Adjustable speed, direction and interval settings make it easy to adapt the movement routine to the daily schedule of your stable. This allows for variation and supports consistent rhythm and structure within training routines.

Durable and Low-Maintenance

- ✓ Including shock preparation
- ✓ Electronic braking system
- ✓ Direct drive
- ✓ Safety coupling
- ✓ Silent during operation
- ✓ Various safety features
- ✓ Low maintenance
- ✓ CE mark
- ✓ Extra heavy duty


SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER


Features

Safety:

The Ceiling Mounted Horse Exerciser is designed to train your horses as safely as possible and include equipped with a direct drive with a safety break coupling, lightweight impact-resistant horse-friendly drift fences and electronic overload adjustment. All dangerous moving parts are protected against contact. The drift fences are suspended in specially developed brackets that ensure that a horse cannot get stuck on a drift fence.

Durability:

By using high-quality industrial parts, we can ensure a very long service life guarantee. Due to a technologically advanced design, the exerciser turns almost silently and very lightly, this makes the Q-line® horse exercisers particularly energy efficient. The Sublime has a cover on the rotating part to protect it against the elements.

External characteristics:

The designs of the horse exerciser aim for a compact and minimalist appearance. The drive section of the exerciser is protected against contact. The drift fences are suspended at a height of 2 meters and made of an aluminum cross bar containing 10 x 1.6 meter long impact-resistant plastic tubes wrapped with a stainless steel spring for electric shock conduction.

Maintenance:

The Q-line® exercisers are very solidly constructed and require very little maintenance. Through the technologically advanced design and the materials used, there is virtually no wear or corrosion, so maintenance is minimized.

Quality marks:

All horse exercisers comply with the machine directive 2006 / 42EG and are provided with the correct quality marks as standard the Q-line® horse exercisers are certified according to the NEN 3140 and ARBO guidelines and meet all European safety requirements.

Control:

The walk-trot box supplied as standard fulfills the need to train the horses daily.

The waterproof box is equipped with:

- 1 main switch
- 2 position switch to choose between walking and trotting.
- 2 potentiometers for the speeds to be set
- 3 position switch to set the turning time - 5/10/15 minutes
- 1 switch to guide the horses in and out of the exerciser
- 2 position switch to let the horses walk only left or only right
- * optional electric current control switch



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

Configuration & options




Dome 18 meter 1500N



USD Lubrication System Sublime



Shock device set Basic 230

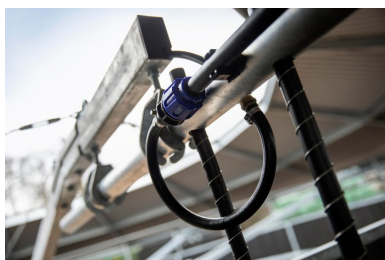

Track irrigation Sublime



Lunging irrigation on 1 arm



Control box cover


SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER

Specifications

Diameter	18 meter
nr of horses	6
Height	2,3 meter
Weight	1000 kg
Width	Hoofptah 2,5 meter
Speed	16 km/h
Drive system	Direct drive
Secure	Break coupler
Electronic brake	yes, adjustable
Included	Shock preparation
Power supply	230 Volt, 50 Hz
Power usage	1000 Watt
Fuse with	16A Type F
Ampere	10A
IP rating	54
Quality mark	CE / NEN3140 / OHS
Drift Fence	Aluminium with safety rods
Suplied as standard	Control box WCB 2.1
Cable length	Motor cable 14 meter
Basic material	Galvanised acc. NEN-EN-ISO 1461-99.
Fixings	Included
Transport size	1 pallet 300cm x 80cm x 150cm
Transport weight	1050 kg

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com