


SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER

Safety Wall door and gate


Frame, Hinge, Shutter

Gate 2 panels / Article no. 30-4-30-01875



The Q-line Safety Wall can be fitted with gates that are essentially invisible to the eye when closed. These innovative gates create a perfectly smooth and seamless finish for your Safety Wall without sharp edges. The gates can contain a maximum of 3 panels and are equipped with a specially developed hinge so that the gate in the sloping wall opens horizontally.

- ✓ Light to open
- ✓ Seamless finish
- ✓ Easy assembly

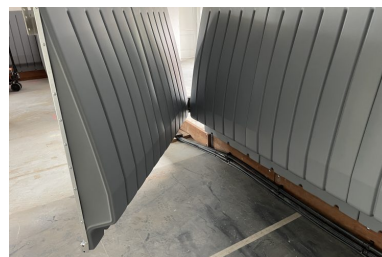



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

Features

Safety:

By opening the gate horizontally, entrapment by a falling gate is excluded.

Durability:

Due to the robustness of the hinges and the frames, the gates are indestructible.

Appearance:

Invisible hinge concealed in the wall.

Maintenance:


The gate hinge does not require lubrication and is maintenance-free.

Easy to assemble:

Because the gate opens horizontally, mounting is very simple and the hinge can easily be mounted against a flat wall.




Q-LINE



SOLARIUM



IRRIGATION



TREADMILL




SAFETY WALL



WALKER

Standard options

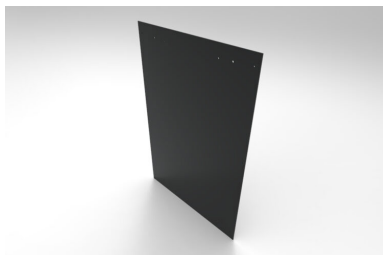

Gate frame cover

**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

Specifications

Suited for	2 panels
Basic material	Galvanized steel
Width	189,6 cm
Height	142 cm
Thickness	3 cm
Weight	63 kg
Included	Horizontal hinge
Colour	Zinc
Suspension	Supplied mounting plate
Fixings	Including
Supplied as standard	Shutter
Transport weight	78 kg
Transport size	190 x 80 x 141 cm

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com