



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

## Full roof cover Dome

For 15M exerciser

Dome 15 meter 750N / Article no. 17-5-25-00015




**SOLARIUM**

**IRRIGATION**

**TREADMILL**

**SAFETY WALL**

**WALKER**
**Construction Details:**

The construction is made of galvanized steel beams, divided into sections. All steel parts are galvanized according to the highest standards (NEN-EN-ISO 1461-99) and have been carefully calculated according to the applicable building regulations.

Image not found **Galvanized steel construction**

**Roofing:**

The roofing consists of steel profile sheets with the renowned 32mm dam wall profile. Manufactured from durable steel and equipped with a high-quality coating, these sheets are tailor-made for your cover. You have the freedom to choose a color that suits your stable, with a reassuring 30-year warranty on the coating, supported by the manufacturer of the coated steel, Arcelor.

Image not found **Calculated according to the standard NEN-EN 1990:2002**

**Anti-Condensation Felt:**

Our roof sheets come standard with anti-condensation felt on the underside. This advanced felt absorbs moisture (up to 600 gr/m<sup>2</sup>) and minimizes condensation between periods of temperature fluctuations, maintaining a healthy climate for your horses.

Image not found **Sufficient crossing**

**Steel Profile Purlins:**

The shelters are equipped with sturdy steel profile purlins. This versatile profile serves as a roof purlin, wall purlin, or floor beam and is reinforced by the inwardly curved extra lip. With a standard zinc layer of Z275 (275 g/m<sup>2</sup>) or ZMA140 (140 g/m<sup>2</sup>), these purlins are resistant to the test of time.

Image not found **Fully covered lunging arena**

**Snow Load:**

Our covers are designed to withstand a snow load, with the responsibility for the snow load lying with the customer. Our commitment to sustainability and safety is our utmost priority.

Image not found **Reinforced footplates**

Choose Sustainability, Choose Q-line

In conclusion, we not only provide protection for your horses but also invest in the long-term functionality of your stable. Our high-quality construction, durable coating, and thoughtful details make Q-line covers the ideal choice for any stable. Contact us today and discover how we can elevate your stable to a higher standard.



**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

## Features

### **Safety:**

The Q-line® covers are designed to train your horses as safely as possible and to protect them against the weather. By finishing everything on the inside smoothly, optimum safety is guaranteed.

### **Durability:**

By using high-quality industrial parts, we can guarantee a very long lifespan. All constructions are therefore standard hot-dip galvanized.

### **External characteristics:**

In the designs of the covers, the aim has been to achieve a compact and minimalist appearance.

The lunge cover has a completely closed roof so that the horses are protected against the weather during training.

### **Maintenance:**

Q-line® covers have a very solid construction and require very little maintenance. Due to the technologically advanced design and the materials used, there is virtually no wear or corrosion, which minimizes maintenance.

### **Quality mark:**

All covers comply with local building regulations and are standard equipped with the CE mark. The Q-line® covers are also calculated by a recognized agency, so that you are assured of an approved construction.



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

## Configuration & options




Fencing for a 15-meter roof



Lunging fence for a 15-meter roof



Rain gutter 11 sections

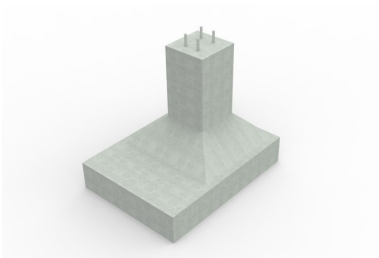

Concrete Foot

**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

## Specifications

<b>Suited for</b>	15 meter exerciser
<b>Diameter</b>	16,5 meter
<b>Height</b>	5,7 mtr
<b>Secure</b>	Snow load 750N / wind area 3
<b>Fixings</b>	Included
<b>Thickness</b>	IPE 180
<b>Basic material</b>	Galvanized steel
<b>Other</b>	11 sections
<b>Included</b>	Strength calculation
<b>Quality mark</b>	According to local regulation NEN-EN 1990:2002
<b>Colour</b>	Zinc / black
<b>Not included</b>	Foundation
<b>Supplied as standard</b>	Rafters, purlins, roof plates, ridge pieces
<b>Transport size</b>	t.b.a.

## Contact details

### **Q-Line Equestrian B.V.**

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

[info@Q-Line.com](mailto:info@Q-Line.com)

[www.q-line.com](http://www.q-line.com)