



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

Mobile irrigation

Mobile riding arena irrigation

Rain train 20x40 / Article no. 26-5-20-03040




SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER

The mobile arena irrigation system offers a practical and efficient solution for providing water to the arena and adjusting the soil hardness. The system utilizes a rail system mounted on the roof of the riding arena, with a trolley that moves back and forth above the arena, providing flexibility and efficiency in irrigation.

The system uses carefully selected nozzles to evenly distribute the desired amount of water over the riding surface. By adjusting the speed of the trolley, the precipitation on the soil can be controlled. Slowing down the trolley increases the amount of water, while increasing the speed reduces the precipitation.

This system allows for precise adjustment of the soil hardness in the arena according to the needs of horses and riders. This enables the creation of ideal conditions for various types of training, such as a firm surface for jumping exercises or a soft surface for dressage.

The mobility of the irrigation system offers flexibility as the trolley can be moved to different parts of the arena. This allows for targeted irrigation of specific areas, such as where more water is needed or where the soil needs to be firmer.

Overall, this system provides a practical and efficient way to irrigate the arena and adjust the desired soil hardness. It offers flexibility, precision, and customization for different training purposes.

If you are looking for solutions to prevent dust formation in the arena, the Q-line® Irrigation Systems provide an effective option. These systems ensure even soil moisture, preventing dust clouds and creating a healthy and pleasant riding surface.

With the Q-line® Irrigation System, you can control the irrigation automatically or manually, depending on your preference. This allows you to always ride on a perfect surface and promote a longer lifespan of the soil and a better riding experience.

The spray heads of the Q-line® system can be individually controlled, allowing for optimal distribution of irrigation and faster drying of specific areas of the arena. The sprayers are designed for uniform irrigation with the right misting.

The user-friendly, waterproof, and lockable control system of Q-line® ensures seamless operation.

fill out the [form](#) and sent it to us for a firm quote

Image not found **Wear-resistant mist nozzles**

Image not found **Years of proven electronic control**


Image not found **Extremely robust**

Image not found **Easy operation**

Image not found **Separate track irrigation**

Image not found **Perfect water distribution**

Image not found **Can be used anywhere**

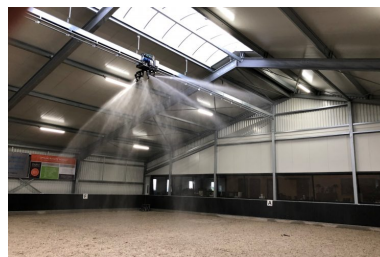

**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

Features

Safety:

The Q-line® irrigation systems are equipped with special sprinklers to irrigate the riding surface as evenly as possible, creating a perfect mist that guarantees a stable riding surface.

Durability:

High-quality materials and a solid construction make Q-line® irrigation systems a sustainable investment.

Appearance:


Due to the optimal distribution of the sprinklers, an even irrigation is obtained. The sprinklers are controlled automatically by means of an easy-to-operate control.

Maintenance:

Due to the high-quality materials used, the maintenance of the irrigation systems is minimized.

Hallmarks:

All irrigation installations comply with the machine directive 2006/42EG and are standard equipped with the CE quality mark. The Q-line® irrigation installations are also factory tested where necessary in accordance with the NEN 3140 and ARBO directive and therefore meet all European safety requirements.

**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

Specifications

Length	40 meters
Width	30 meter spray range
Height	Suspension height min 5 meters
Suspension	Attached to your ceiling
Basic material	Aluminium guide
Drive system	Non-slip with toothed belt
Connection	2"
Speed	12 m/min adjustable
Time	Adjustable
Required liters	6000 l/h
Required working pressure	4 bar
Fixings	Included
Optional	Automatic drain
Housing	Plastic
Power cord	230V L/N/PE
Electric valve	1 main valve, 3x spray valve 24V
Valve voltage	24V
Nozzles	6 x
Power supply	230V 50Hz
Fuse with	16A
Ampere	10
Power usage	1KVA
Weight	1000 kg
IP rating	65
Quality mark	CE
Transport weight	1250 kg
Transport size	582 x 82 x 108 cm

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com