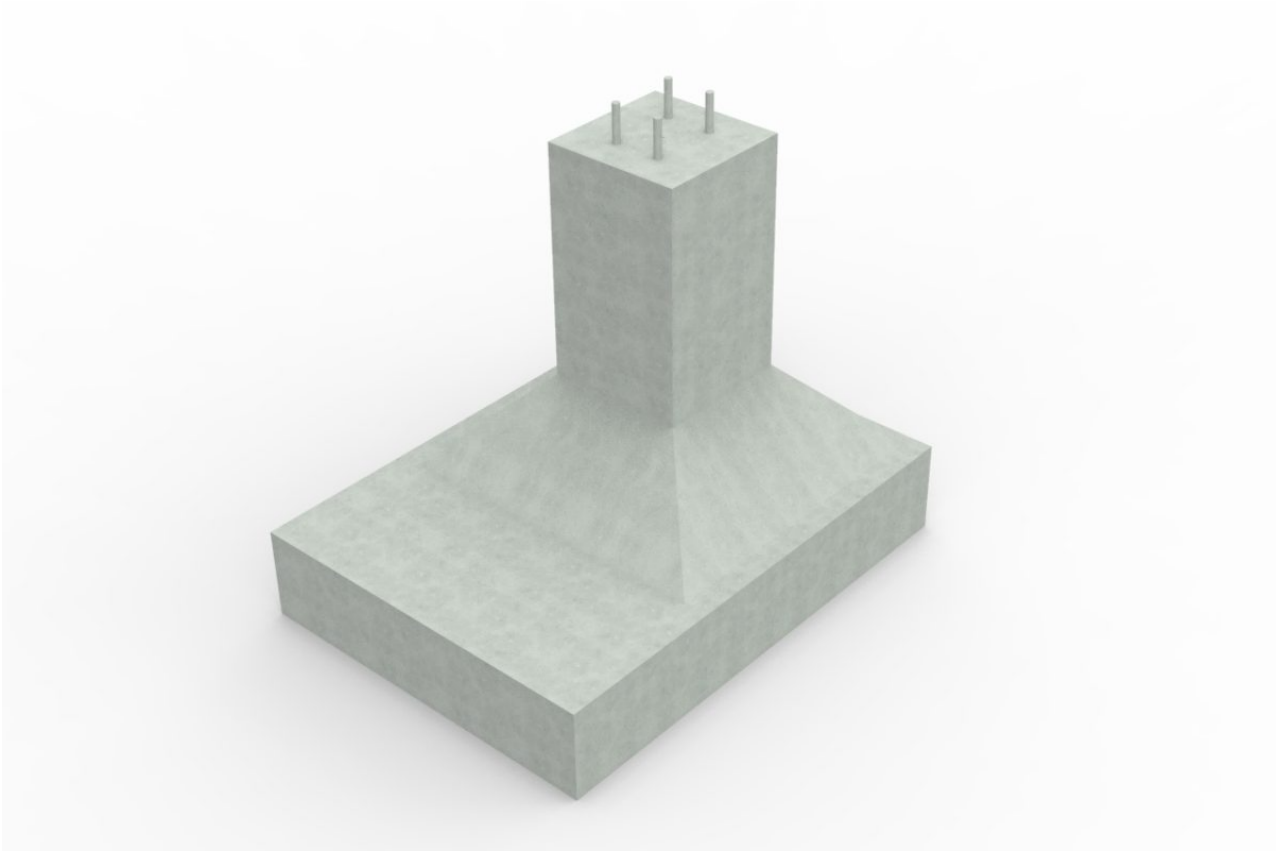
Q-LINE

SOLARIUM | IRRIGATION | TREADMILL | SAFETY WALL | WALKER

Concrete foot

Asymmetrical concrete foot

Concrete Foot / Article no. 17-4-25-00001



Concretefoot to mount the steel construction of the roof, because of the asymmetrical shape the base provides stability in the construction.


- Easy to install
- Including anchors
- Sturdy foot





Q-LINE.COM

Q-LINE


SOLARIUM


IRRIGATION


TREADMILL



SAFETY WALL


WALKER

Features

Reinforced concrete including 4 M16 anchors

Q-LINE


SOLARIUM


IRRIGATION


TREADMILL


SAFETY WALL


WALKER

Specifications

Basic material	Concrete
Length	1000 mm
Width	800 mm
Height	900 mm
Thickness	300 x 300 mm
Transport weight	765 Kg
Transport size	0,8 x 1 x 0,9 m.

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com