



Q-LINE



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL




WALKER

Safety Flex push panel

Light weight impact proof horse freindly push panel

3 meter 10 drop rods / Article no. 23-4-80-00130

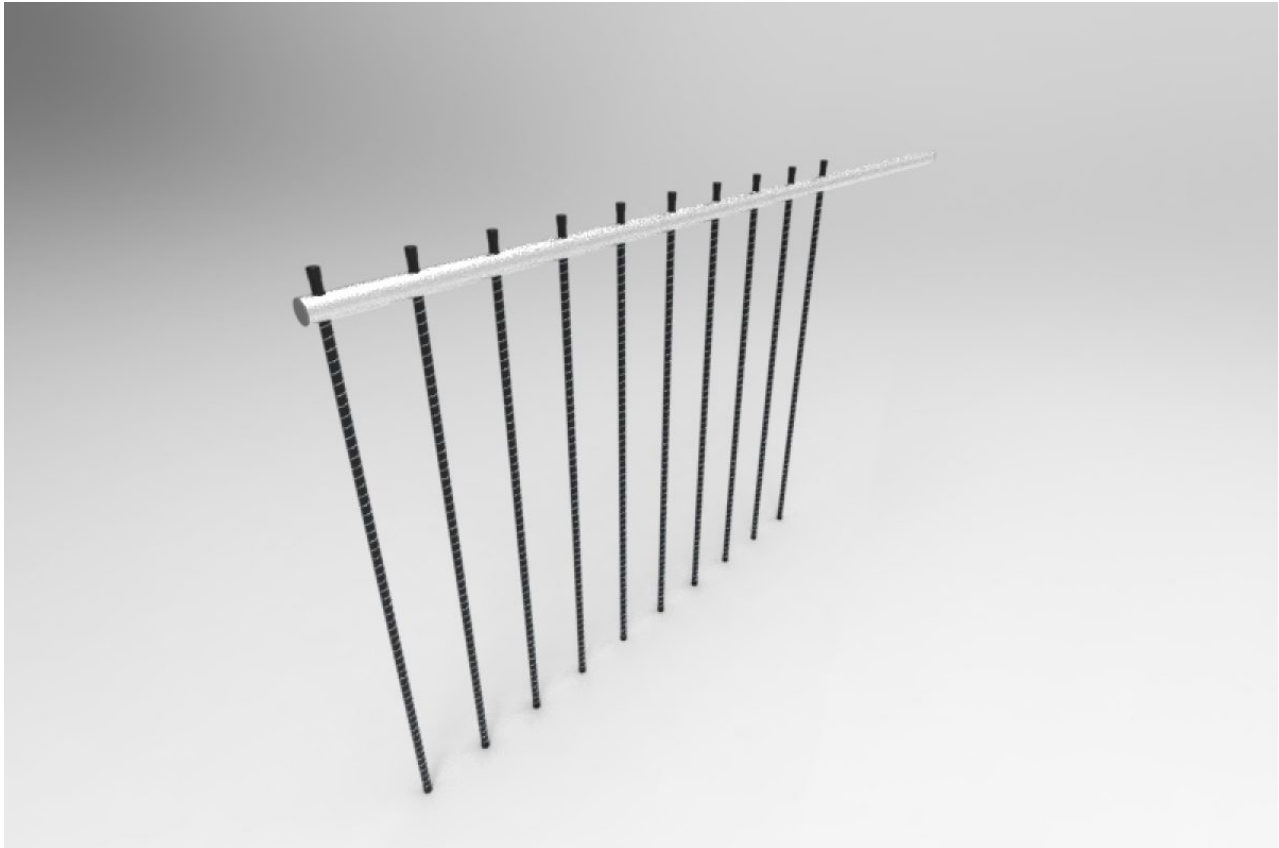


SOLARIUM

IRRIGATION

TREADMILL

SAFETY WALL

WALKER

The lightweight freely movable push panel with electric shock conducting drop rods, is the safest push panel on the market and is one of Q-Line's standard innovations. No other exerciser has these advanced and horse friendly push panels. The horse-friendly push panels are light, flexible and are suspended in holders that ensure that the push panel can rotate around its own axis. The lightweight, impact-resistant drop rods are fitted with a shock conducting stainless steel wire as standard.

If you want to attach the impact-resistant horse-friendly push panels to another brand of walker, it is wise to also purchase the suspension system developed by Q-Line. This guarantees safe use and a long service life.

Image not found **Impact resistant**

Image not found **Lightweight**

Image not found **Safe**

Image not found **Flexible**

Image not found **Conductive**



Features

Safety:

The lightweight impact-resistant horse-friendly push panels are designed to train your horses as safely as possible and come include shock conductive parts.

The Safety Flex push panels are suspended in specially developed holders that ensure that a horse cannot get stuck in a drift fence.

Sustainability:

By using high-quality industrial parts, we can guarantee a very long lifespan. Due to a technologically advanced design, the walker rotates almost silently and very lightly, making the Q-line® exercise mills particularly energy-efficient.

Appearance:

The push panels are suspended at a height of 2 meters and consist of an aluminum cross tube containing 1,6 meter long impact-resistant plastic tubes wrapped with a stainless steel spring for shock conduction.



SOLARIUM



IRRIGATION



TREADMILL



SAFETY WALL



WALKER

Maintenance:

Due to the technologically advanced design and the materials used, there is virtually no wear or corrosion, which minimizes maintenance.

Quality marks:

All parts comply with the machine directive 2006/42EG and are standard provided with the correct quality marks, the Q-line® products are also certified ex-factory in accordance with the NEN 3140 and ARBO directive and therefore meet all European safety requirements.

**SOLARIUM****IRRIGATION****TREADMILL****SAFETY WALL****WALKER**

Specifications

Basic material	Aluminium / Polyethylene
Fixings	Not included
Width	Suitable for walkway from 2.3 to 2.5 mtr
Thickness	Drop rod 29mm
Drift Fence	Safety Flex
Weight	8,2 Kg
Height	1,66 mtr
Included	10 drop rods / 1 cross bar
Length	3 mtr
Not included	Suspension set
Suspension	Optional to purchase
Transport weight	9 Kg
Transport size	300 x 20 x 15 cm on Euro pallet

Contact details

Q-Line Equestrian B.V.

Haarbrinksweg 47

7678 RS Geesteren

Tel. +31(0)546212361

info@Q-Line.com

www.q-line.com